


WHAT IS HYPERBARIC OXYGEN THERAPY CHAMBER

When the air pressure is increased, oxygen is efficiently absorbed into the body.

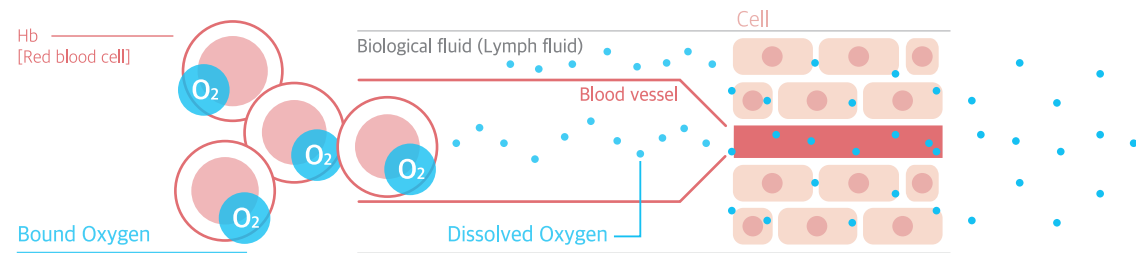

HYPERBARIC OXYGEN THERAPY CHAMBER INDICATION

Cosmetic surgery / Orthopedics / Rehabilitation

Edema reduction(finger reconstruction surgery), cell regeneration after microsurgery, treatment of muscular or skeletal damage

Internal medicine

Chronic asthmatic bronchitis, acute exogenous pneumonia poisoning(carbon monoxide poisoning, gas poisoning in the case of fire), aftereffects of stroke, cerebral hemorrhage, cerebral infarction, hardening of arteries, diabetes, ischemia, heart disease, etc.

Neurosurgery / Neurology

Senile dementia, apoplexy, paralysis, neurosis, autism, schizophrenia, headaches, migraines, etc.

Surgery

Infection from external injury, acute soft tissue damage, ulcer, burns, wounds, skeletal problems, etc.

Dermatology

Acne, herpes simplex, herpes zoster, pattern hair loss, beautification, etc.

Ophthalmology

Diabetic retinitis, corneitis, etc.

Other


The bends(from diving), improving athletic performance(currently used by countless well-known athletes), stress alleviation and recovery from fatigue, improving mental activity and ability to



HBOT Medical Co., Ltd.

#4-101 Medical Industry Techno-center, 42-10, Taejanggungdan-gil, Wonju-si, Gangwon-do, Republic of Korea

Tel | +82-33-737-0106 Fax | +82-33-737-0107 E-Mail | sales@hbotmedical.com

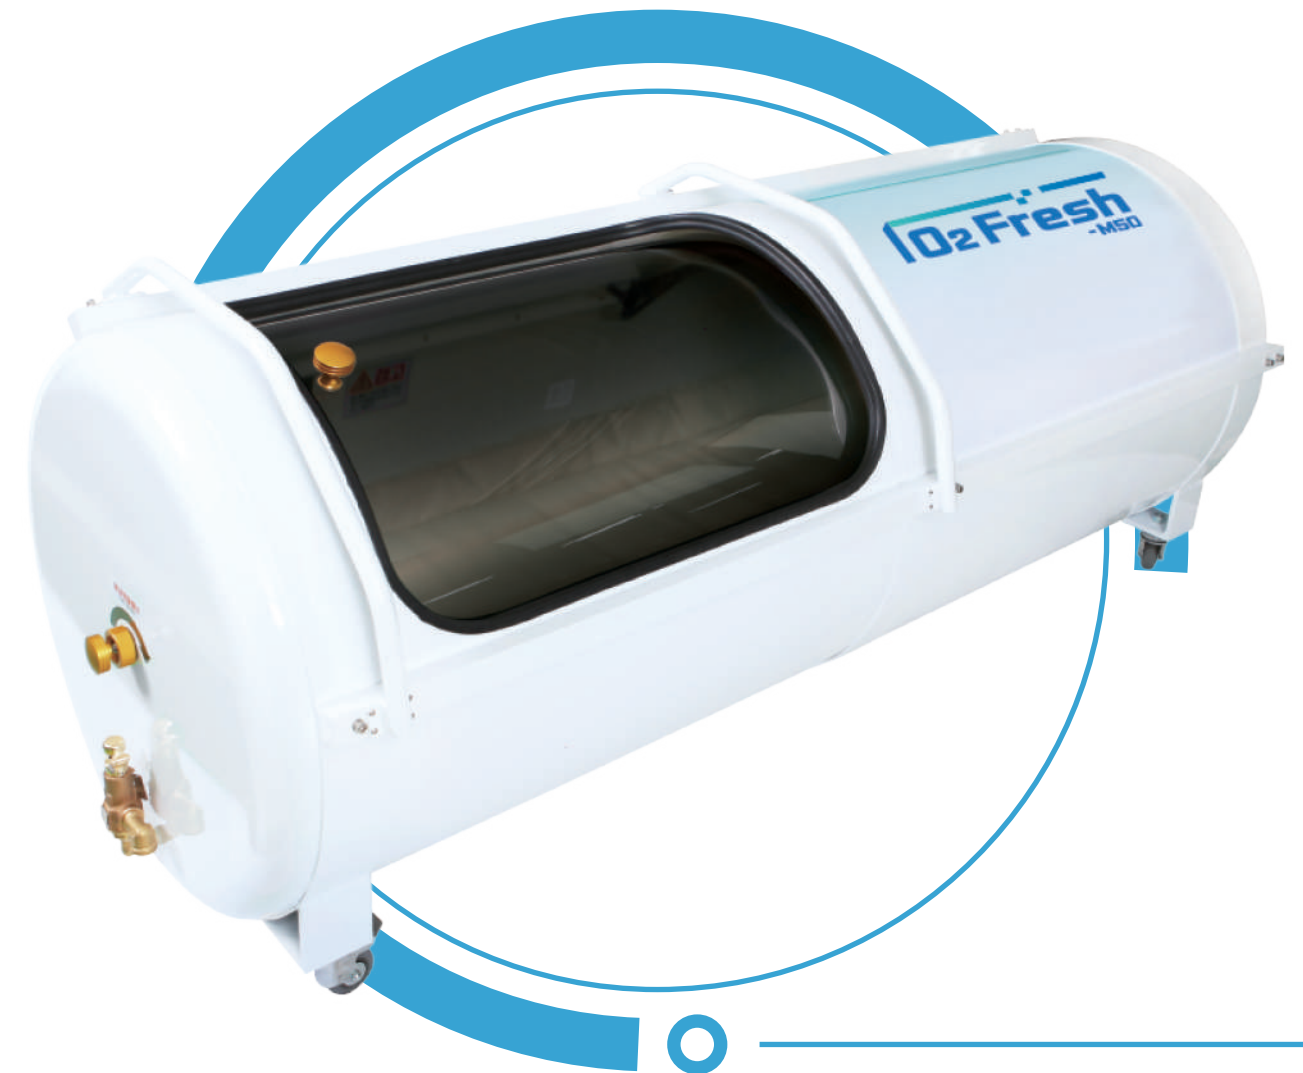

O2 Fresh -M50

HBOT MEDICAL

HYPERBARIC OXYGEN THERAPY CHAMBER

HBOT medical Co., Ltd. is the specialized manufacturer of HBOT chambers. O2 Fresh-M50 is a Monoplace Hyperbaric Chamber designed and manufactured by HBOT medical Co., Ltd.




HYPERBARIC
OXYGEN THERAPY
CHAMBER

O2 Fresh -M50



Touchable internal display

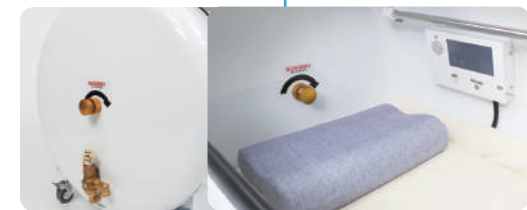

Emergency release valve



Internal air conditioner

CHAMBER



Touchable system display

SYSTEM



Micro pressure control valve



Working pressure
10 ~ 50kPa (1.1 ~ 1.5ATA)

OXYGEN GENERATOR

FEATURES



Intuitive touch display
providing various information



One touch
treatment mode



Liquefied oxygen available
(if necessary)



Simple setup and installation



Internal intercom
display



Wide entry door

SPECIFICATION

O2 FRESH-M50

Chamber	Usage	One Patient
	Operation Pressure	10 ~ 50kPa (1.1 ~ 1.5ATA)
	Size	2200mm x Ø800mm
	Weight	125kg
	Material	Aluminum
System	Air Volume	100L / min
	Voltage	220/110VAC, 50/60Hz
	Power Consumption	950VA
	Size	(W)450mm x (D)642mm x (H)1095mm
	Weight	94kg
	Material	Steel
Installation Space		(W)3000mm x (D)1500mm

OXYGEN GENERATOR

Oxygen Volume	1 ~ 5L / min
Oxygen Concentration	93 ± 3%
Voltage	220VAC, 50/60Hz
Power Consumption	290W
Noise	Less than 45db
Size	(W)390mm x (D)230mm x (H)600mm
Weight	14.2kg
Country of Origin	South Korea